


# PODEYE TORIC

Monofocal  
Toric  
Hydrophobic

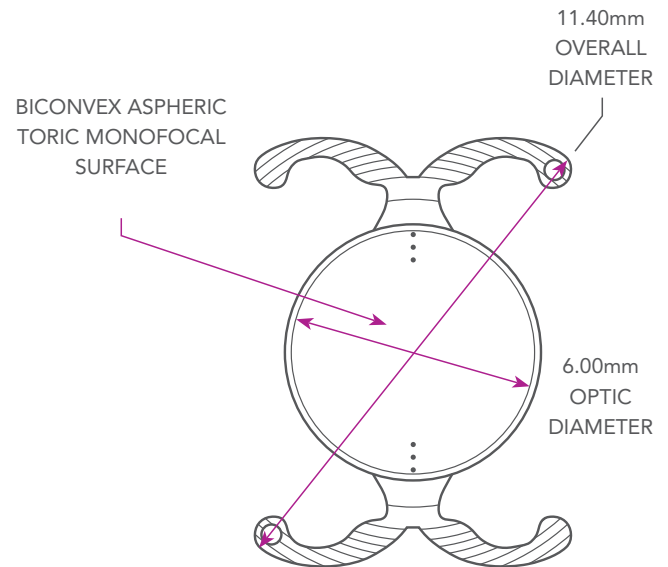

## Description

Model	PODEYE TORIC								
Material	GFY Hydrophobic Acrylic <sup>1</sup>								
Overall diameter	11.40mm								
Optic diameter	6.00mm								
Optic	Biconvex Aspheric Toric Monofocal								
Haptic design	Double C-loop with Ridgetech® & Posterior Angulated Haptic								
Filtration	UV & Blue Light								
Refractive index	1.53								
Abbe number	42								
Injection system	Medical Accuject 2.1 / 2.2								
Spherical power <sup>4</sup>	+6D to +30D (0.5D steps)								
Cylinder power (IOL plane) <sup>4</sup>	1.00 - 1.50 - 2.25 - 3.00 - 3.75 - 4.50 - 5.25 - 6.00D								
Suggested A constant <sup>2</sup>					<b>Interferometry</b>				
	<b>Hoffer Q: pACD</b>				5.85				
	<b>Holladay 1: Sf</b>				2.06				
	<b>Barrett: LF</b>				2.09				
	<b>SRK/T: A</b>				119.40				
	<b>Haigis<sup>3</sup>: a0; a1; a2</b>				1.70; 0.4; 0.1				
Cylinder power at IOL plane	PODEYE TORIC 1.0	PODEYE TORIC 1.5	PODEYE TORIC 2.25	PODEYE TORIC 3.0	PODEYE TORIC 3.75	PODEYE TORIC 4.5	PODEYE TORIC 5.25	PODEYE TORIC 6.0	
	1.00D	1.50D	2.25D	3.00D	3.75D	4.50D	5.25D	6.00D	
Cylinder power at corneal plane <sup>5</sup>	0.68D	1.03D	1.55D	2.06D	2.57D	3.08D	3.60D	4.11D	

<sup>1</sup> The PhysiOL GFY® is patented since 2010.

<sup>2</sup> Values estimated only: surgeons are recommended to personalize their A-constant based on their surgical techniques and equipment, experience with the lens model and postoperative results.

<sup>3</sup> Not optimized.

<sup>4</sup> Please check the availability of spherical and cylinder powers with your sales representative.

<sup>5</sup> Savini G., J Cataract Refract Surg 2013; 39:1900–1903.

Note: The PODEYE TORIC intraocular lens is not FDA approved.

## Product Information

<b>Manufacturer</b>	PhysIOL s.a. - Liège Science Park Allée des Noisetiers 4 B-4031 Belgium +32 4 361 05 49 physiol@bvimedical.com
<b>Certificate information</b>	CE (EU) 2017/745, Annex IX Chapter II : MDR 735726 R000 QMS (EU) 2017/745, Annex IX Chapter I and III : MDR 735719 R000 ISO 13485:2016 & EN ISO 13485:2016 : MD 658518 ISO 13485:2016 : MDSAP 691544
<b>Shelf life</b>	Five (5) years from manufacturing date
<b>Intended purpose</b>	The posterior chamber intraocular lens is intended to be placed into the capsular bag with an anterior capsulorhexis for the replacement of the human lens to achieve the visual correction of aphakia in adult patients in whom the cataractous lens has been removed.
<b>Indication for use</b>	The lens should be used as intended in adult patients, with pre-existing astigmatism, surgically treated for cataract, who desire improved uncorrected far vision, with reduced spectacle dependence.
<b>Product Composition</b>	No products of animal or human origin are present in the implant. The intraocular lens is 100% composed of the covalently crosslinked proprietary material of medical quality (GFY), which is a (2-hydroxyethylmethacrylate; phenoxy ethylacrylate; polypropylene glycol dimethacrylate) copolymer, including a UV and a blue light-filtering chromophores covalently bound to the material.
<b>Sterility</b>	All IOLs from PhysIOL are steam sterilized
<b>Packaging Material</b>	Holder (Polypropylene) Container (Polypropylene) Storage liquid (0.9% NaCl solution) Aluminium lid (Aluminium Gold) Container label (paper) Blister PP (Polypropylene) Tyvek lid
<b>Product Class</b>	Classified as Class IIb implantable long-term surgically invasive medical devices under Rule 8 of Annex VIII of the MDR 2017/745. Not available in the United States

